

**WITTKE**

# Wittke Front Loaders



# Wittke Front Loaders

ANYTHING IS POSSIBLE WITH A WITTKE™

With their robust yet streamlined design and constructed with AR450 Abrasion Resistant Steel for higher augmented payload capacity, the Wittke™ Front Loaders optimize waste capacity and revenue. With quick arm cycles, Wittke™ ensures efficient daily routes.

The Wittke™ Starlight is renowned for its agility, handling both residential and commercial routes. Its low body weight maximizes legal payload capacity, and its rapid-lifting cycle guarantees fast loading on the route.

The Wittke™ Superduty stands as the most rugged among front loaders, engineered for minimal maintenance requirements and to deliver the lowest total cost of ownership. This is achieved through the integration of upsized body structural members with time-tested Wittke™ designs.

Elevate your waste management strategy with Wittke™ Front Loaders!

## Laying the foundations for a truly exceptional product.

### WITTKE™ INNOVATIONS

With a strong emphasis on innovation, Wittke's engineering team has crafted a comprehensive range of customizable options to cater to even the most stringent customer requirements. We are poised and eager to embrace emerging industry trends and fulfill evolving customer demands. This perpetual cycle of innovation positions Wittke™ as the forefront leader in front loader solutions across North America.

### WEIGHT DISTRIBUTION

Over years of innovation, Wittke™ trucks prioritize ideal weight distribution. Our ongoing objective is to achieve the perfect material balance, ensuring units collect more waste while maintaining the highest legal payload.



**ENVIROLINK™ HAS LAID THE FOUNDATIONS FOR A BRAND-NEW ERA IN TRUCK INTELLIGENCE.**

An improved multiplex network and analog system, cameras and monitors, scales, diagnostic tools, safety interlocks, alerts, GPS tracking, and more are now packaged in a more precise, reliable, and efficient Smart Collection Package.

Tailgates ranging from 0 yd³ to 6 yd³ based on body capacity

Starlight Body Sizes:  
30 yd³ to 44 yd³ body sizes

Superduty Body Sizes:  
34 yd³ to 44 yd³ body sizes

Curved body maximizes capacity, reducing weight

Up to 650 lbs/yd³ compaction

Packer shelf 24 inches wide

Body side mounted hydraulic valves (streetside)

12 yd³ hopper capacity

Single piece Abrasion Resistant steel body wall construction

Zinc-plated hydraulic tubing

WITTKE	Wittke Front Loaders	AUTOMATED	MANUAL	RESIDENTIAL	COMMERCIAL	DEMOLITION	ORGANICS	ALLEYS TIGHT AREAS	RECYCLING	TIP TO DUMP	FULL EJECT	SPLIT BODY	50>82 DGE	50>96 DGE	50>100 DGE	60>97 DGE	FRAME	ROOF	CAB	TAILGATE	EV	
				●	●				●		●					◆ CNG	◆ CNG	◆ CNG		◆ CNG		



### **STRONGEST ARMS**

Wittke™ arms deliver swift and smooth lifting. Thanks to the high-flow Muncie pump, packing takes just 18-20 seconds, and an arm cycle, only 12-14 seconds.



### **ARM TRUNNION BEARINGS**

Unlike standard bushing designs that require frequent replacement due to the daily cycling of front loader arms, Wittke's engineered steel trunnion bearings, mounted externally, are designed to last the unit's entire lifespan with proper lubrication.




### **SHELF DESIGN & CANOPY SWEEPER**

Effectively reduce debris on routes. The second arm lift directs waste to the hopper, not the ground. Wittke™ loaders feature gutters for fluid control, minimizing spillage.



### **PLOW-SHAPED PACKER PANEL**

The unique plow shape of Wittke's packer ensures debris remains inside the body, not trapped behind it. The angled design enhances force transfer, resulting in a notable increase in compaction efficiency and reduced cleaning expenses.

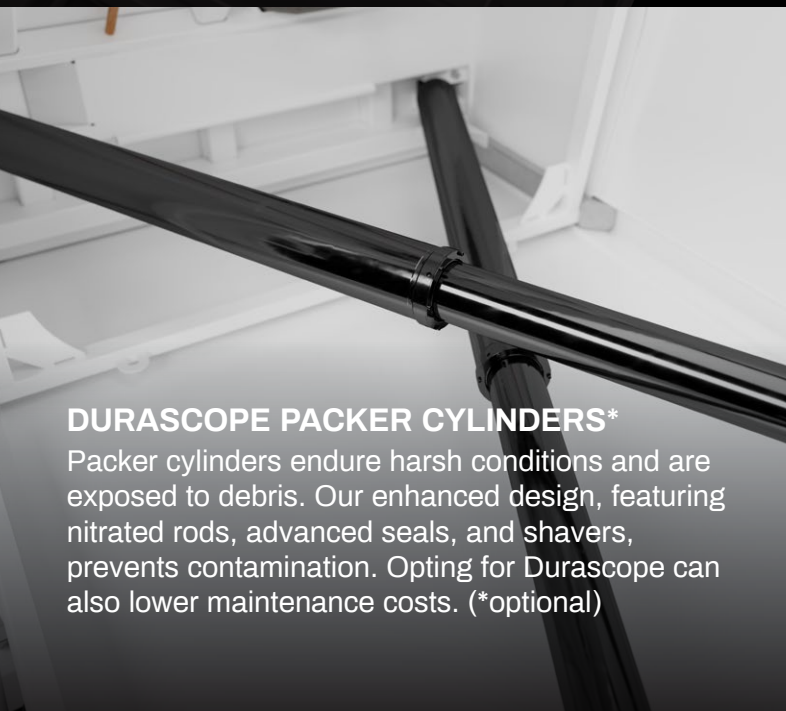

### **DURASCOPE PACKER CYLINDERS\***

Packer cylinders endure harsh conditions and are exposed to debris. Our enhanced design, featuring nitrated rods, advanced seals, and shavers, prevents contamination. Opting for Durascope can also lower maintenance costs. (\*optional)



### **ABRASION RESISTANT STEEL**

High-quality, lightweight yet durable AR steel in the body, packer, hopper, and tailgate. It offers 5 times the abrasion resistance of mild steel. It offers the best strength-to-weight ratio, achieving higher payloads.

\*Compaction ratios will vary based on commodity and environmental factors

# Wittke Front Loaders Specifications

Body Specifications	Starlight	Superduty
Body Floor	0.157" AR450 175,000psi	3/16" AR450 175,000psi
Body Sides	1/8" AR450 175,000psi	0.157" AR450 175,000psi
Body Roof	1/8" AR450 175,000psi	0.157" AR450 175,000psi
Tailgate (Curved Face)	1/8" AR450 175,000psi	0.157" AR450 175,000psi

Cylinder Specifications	Starlight	Superduty
Packer Cylinders (30yd <sup>3</sup> bodies)	3 stages 5-1/2" bore x 133-9/16" stroke	-
Packer Cylinders (34yd <sup>3</sup> bodies)	3 stages 5-1/2" bore x 167-13/16" stroke	3 stages 5-1/2" bore x 167-13/16" stroke
Packer Cylinders (38yd <sup>3</sup> bodies)	3 stages 5-1/2" bore x 181-1/2" stroke	3 stages 5-1/2" bore x 181-1/2" stroke
Arms Cylinders (8,000 lbs Lifting capacity)	4-1/2" bore x 2" rod x 45-3/8" stroke	4-1/2" bore x 2" rod x 45-3/8" stroke
Forks Cylinders	3-1/2" bore x 1-3/4" rod x 19" stroke	3-1/2" bore x 1-3/4" rod x 19" stroke
Tailgate Cylinders	2-1/2" bore x 1-3/4" rod x 39" stroke	2-1/2" bore x 1-3/4" rod x 39" stroke
Top Door Cylinder	2-1/2" bore x 1-1/2" rod x 92" stroke	2-1/2" bore x 1-1/2" rod x 92" stroke

Performance	Starlight	Superduty
Arms Up	12 - 14 sec @ 700 rpm	12 - 14 sec @ 700 rpm
Arms Down	10 - 12 sec @ 700 rpm	10 - 12 sec @ 700 rpm
Forks Up	3.5 - 4.5 sec @ 700 rpm	3.5 - 4.5 sec @ 700 rpm
Forks Down	3.5 - 4.5 sec @ 700 rpm	3.5 - 4.5 sec @ 700 rpm
Packer Extend	14 - 18 sec @ 1500 rpm	14 - 18 sec @ 1500 rpm
Packer Retract	5 - 6 sec @ 700 rpm	5 - 6 sec @ 700 rpm
Top Door complete cycle	13 - 17 sec @ 700 rpm	13 - 17 sec @ 700 rpm
Tailgate Open	21 sec @ 700 rpm	21 sec @ 700 rpm
Tailgate Close (with Safety Flow limiter)	26 sec @ 700 rpm	26 sec @ 700 rpm


Packer Specifications	Starlight	Superduty
Compaction ratio (lbs/yd <sup>3</sup> )	600	650
Packer Panel Lower Face Plate	3/16" AR450 175,000psi (1/4" on 34 yd <sup>3</sup> bodies)	1/4" AR450 175,000psi (1/4" on 34 yd <sup>3</sup> bodies)
Packer Panel Upper Face Plate	0.157" AR450 175,000psi	0.157" AR450 175,000psi
Bottom packer Wear Shoes	3/8" AR450 175,000psi (Chromium optional)	3/8" AR450 175,000psi (Chromium optional)

Hopper Specifications	Starlight	Superduty
Hopper Size (yd <sup>3</sup> )	12	12
Hopper Width	80"	80"
Hopper Floor	3/16" AR450 175,000psi	1/4" AR450 175,000psi
Hopper Sides	0.157" AR450 175,000psi	3/16" AR450 175,000psi

Fork Specifications	Starlight	Superduty
Forks Thickness	1" Domex 100 100,000psi	1-1/2" Domex 100 100,000psi


Arm Specifications	Starlight	Superduty
Arm Construction	10,000 lbs load rated arms	10,000 lbs load rated arms
Arm Thickness	4"	4"
Arm Side Plates	1/4" 1 Domex 1000 100,000psi	1/4" Domex 1000 100,000psi
Arm Lifting Capacity	8,000 lbs (10,000 lbs optional)	8,000 lbs (10,000 lbs optional)

Hydraulics Specifications	Starlight	Superduty
Pump Make & Model	Denison T6DC (gear)	Muncie Live Pak (gear)
Pump Capacity	66 gpm @ 1500 rpm	60 gpm @ 1500 rpm
Max. Operating Pressure	2,500 psi	2,750 psi
Oil Reservoir	74 gal	74 gal

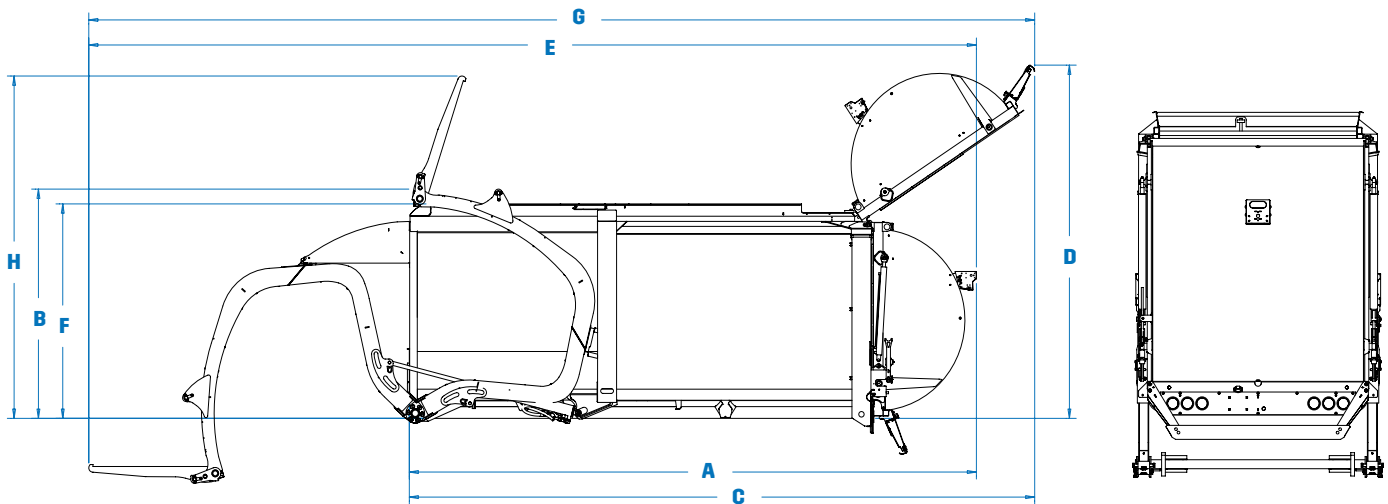

Body Dimensions	32yd <sup>3</sup> (30+2)	34yd <sup>3</sup> (30+4)	36yd <sup>3</sup> (30+6)	36yd <sup>3</sup> (34+2)	38yd <sup>3</sup> (34+4)	40yd <sup>3</sup> (34+6)	40yd <sup>3</sup> (38+2)	42yd <sup>3</sup> (38+4)	44yd <sup>3</sup> (38+6)
A. Overall Length with Arms Stowed. Tailgate Closed (in.)	245	260	275	269	284	299	296	311	326
Overall Width (in.)	102	102	102	102	102	102	102	102	102
B. Overall Height Above Frame with Arms Stowed. Tailgate Closed (in.)	118	118	118	118	118	118	118	118	118
C. Overall Length with Arms Stowed. Tailgate Open (in.)	305	305	305	329	329	329	356	356	356
D. Overall Height Above Frame with Arms Stowed. Tailgate Open (in.)	181	181	181	181	181	181	181	181	181
E. Overall Length With Arms/Forks Down. Tailgate Closed (in.)	414	429	444	438	453	468	465	480	495
F. Overall Height Above Frame With Arms/Forks Down. Tailgate Closed (in.)	110	110	110	110	110	110	110	110	110
G. Overall Length With Arms/Forks Down. Tailgate Open (in.)	474	474	474	498	498	498	525	525	525
H. Overall Height Above Frame with Arms Stowed/Forks Up. Tailgate Closed	175	175	175	175	175	175	175	175	175

Note: Specifications subject to change without notice

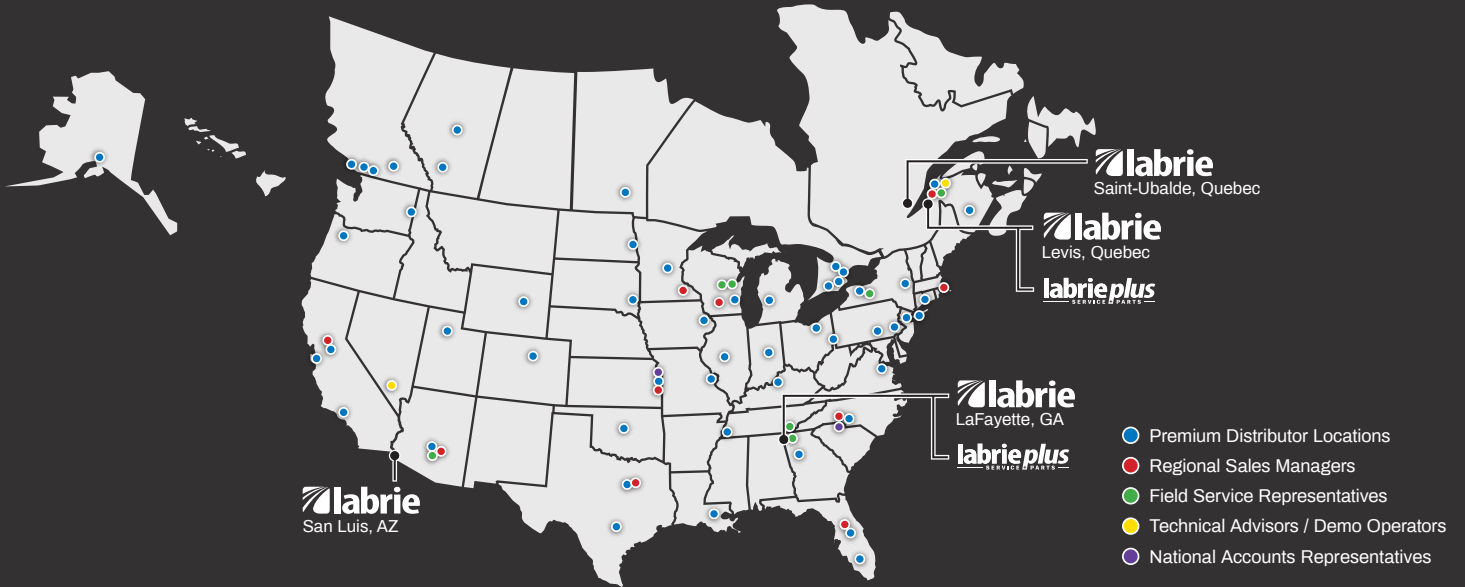

## Our North American network is dedicated to quality.

Wittke™ trucks are supported by over 30 top-tier distributors spanning across 50+ sites in the US and Canada, guaranteeing a commitment to driving excellence and providing expert support.



Opt for the Wittke™ Pronto Stock Program when a pre-built model makes sense. Benefit from expedited delivery, cost savings, and a wide selection of models designed to cater to even the most demanding collection needs.




With Sourcewell, save time and money by combining the buying power of more than 50,000 government, education, and nonprofit organizations.



# DRIVE EXCELLENCE™



175-B, route Marie-Victorin, Lévis, Quebec, Canada, G7A 2T3  
 Toll Free: 1-800-463-6638 | Telephone: 418-831-8250  
 sales@labriegrup.com | www.labriegrup.com



**United States of America**  
 1198 Shattuck Industrial Blvd, Lafayette, GA, 30728  
 Toll Free: 1-800-231-2771  
 usa.labrieplus.com | partscenter@labrieplus.com

**Canada**  
 455 Ave 1, Levis, Quebec, Canada, G6W 5M6  
 Toll Free: 1-877-452-2743  
 canada.labrieplus.com | labriepluqc@labriegrup.com

**labrieplus**  
SERVICE + PARTS

# VersaBinz

by LabriePlus



# VersaBinz — Front-Mounted Residential Cart System

Turn Your Front Loader into an Automated Cart Solution

VersaBinz™ is LabriePlus's front-mounted cart system for commercial front loader fleets. Built to integrate on proven front loader platforms, VersaBinz delivers a ready-to-work residential cart collection package—helping your team add cart routes without compromising everyday commercial performance.

## Built for Residential Routes — With Fleet Flexibility

VersaBinz lets your front loaders handle high-volume cart routes without changing how the truck works. It turns a commercial front loader into an automated cart machine during peaks, then can be removed or moved to another truck as routes evolve.\*

### WHERE VERSABINZ FITS

- Residential streets with standardized roll-out carts
- Mixed commercial / residential or seasonal programs

VersaBinz boosts stops-per-hour by combining automated arm, a quick dump cycle and the large capacity of a front loader body. The driver stays in the cab—no manual lifting at the curb—while carts are managed directly in front of the truck for excellent visibility. Also available integrated with Wittke™ Starlight and Wittke™ Superduty models.

\*With hydraulic provision installed on the body



Helping-Hand™-inspired S-Boom design

Proven Labrie™ gripper mechanism

Service-friendly access for maintenance

VersaBinz

Rear-mounted automated arm


Heavy-duty VersaBinz™ container & floor

Standard worklights

### ENGINEERED FOR STRENGTH, SIMPLICITY & SERVICEABILITY

VersaBinz uses a robust lever-and-pivot gripper and a Helping-Hand™-inspired S-Boom to stand up to repetitive loading. Hydraulics are kept clean and accessible so technicians can keep trucks working with less effort.

- Integrated hydraulic valve block reduces hoses and leak points
- Automatic hydraulic lock secures arm and bin when stowed near the hopper
- Sacrificial hook helps protect the main structure in extreme misuse
- Standard lighting integration and shared LabriePlus™ components simplify parts and service

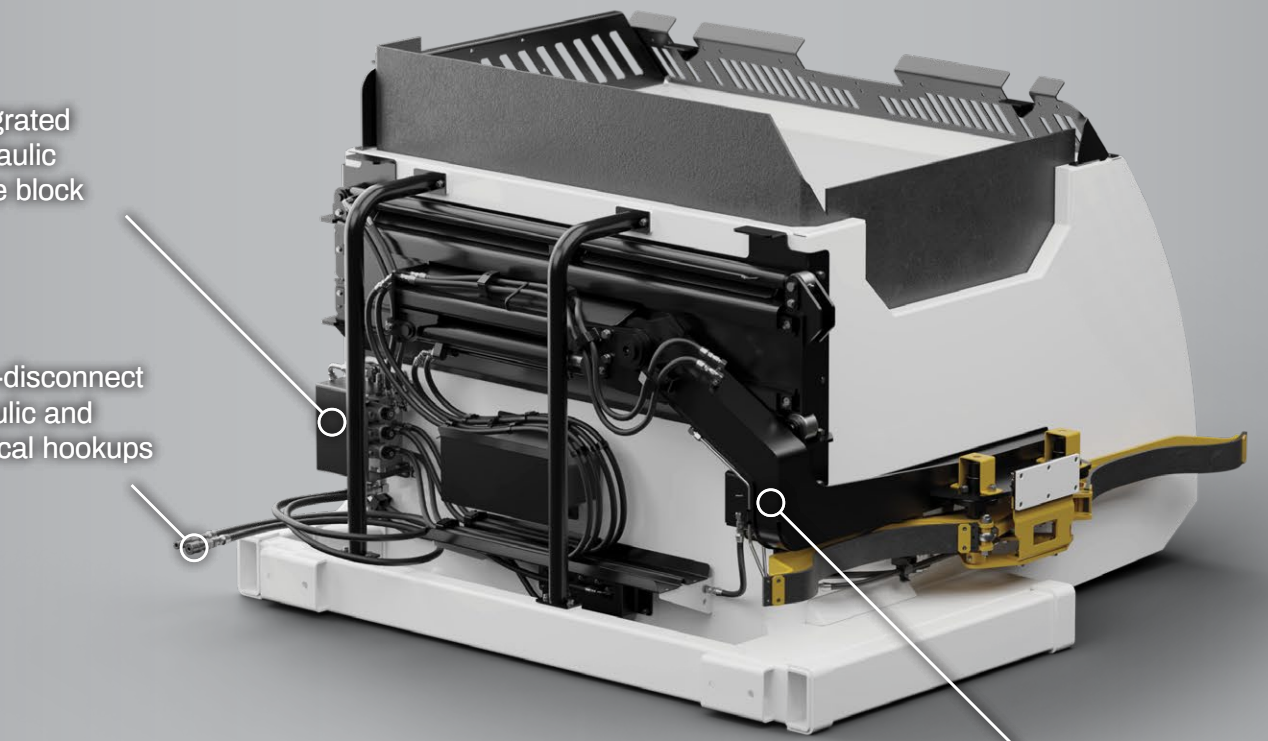

Integrated hydraulic valve block

Quick-disconnect hydraulic and electrical hookups

Automatic hydraulic lock – arm & bin

Stronger front structure improves payload capacity

Upgraded main pivot pin design to significantly reduce wear and extend service life

Low-friction adjustable rollers

# VersaBinz Technical Specifications

## Dimensions

Overall Size	55.25" H x 79.5" W x 80.25" L
Inside Height	45.75"
Lifting Pocket	6" H x 3" W x 0.25" thick high-strength steel
Weight	1870 lbs.

## Capacity

Carts	32 to 96 gal.
Lift Capacity	500 lbs.
Volume	4.1 yd <sup>3</sup>

## Control System

In-cab proportional joystick, with optional auxiliary controls in-cab or on the front-loader lift arms




## Cycle Times @ 14 gpm

Full Slide Extend	2.5 seconds
Full Slide Retract	1.5 seconds
Dump	2.0 seconds
Dump Return	1.2 seconds

## Hydraulic System

Pressure	2000 psi
----------	----------

*Note: Specifications subject to change without notice*

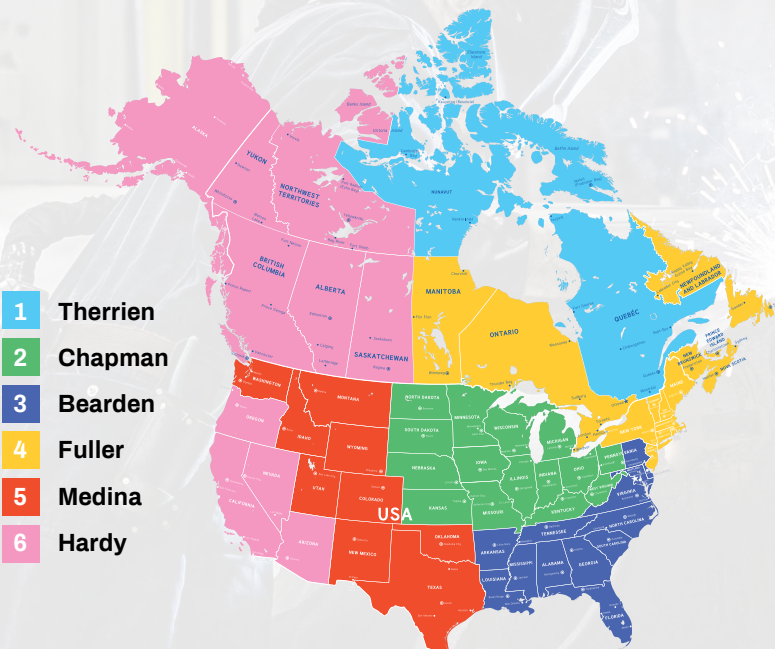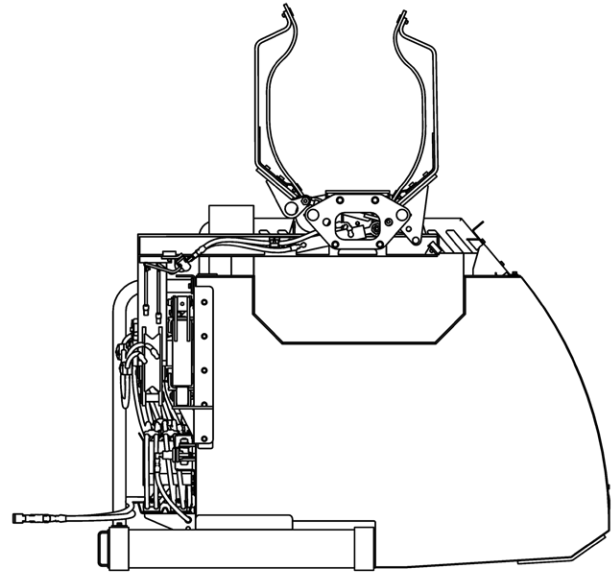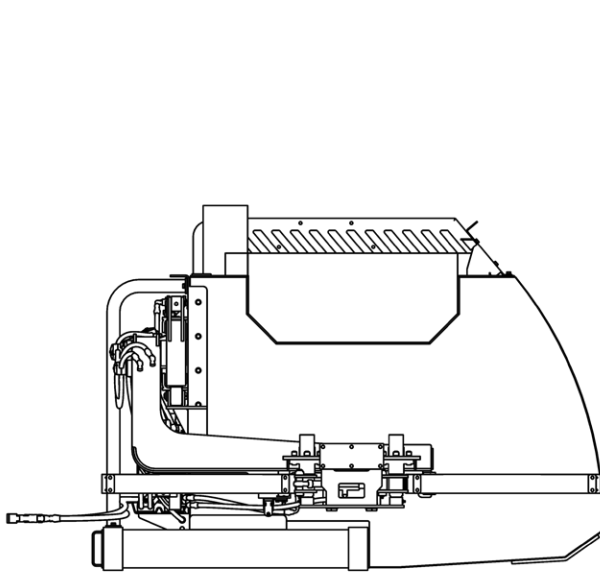


- 1 Therrien
- 2 Chapman
- 3 Bearden
- 4 Fuller
- 5 Medina
- 6 Hardy

**labrieplus**  
SERVICE PARTS

**PREMIUM PRODUCTS,  
COME WITH  
PREMIUM SUPPORT**

LabriePlus™ Parts & Service is a full-service customer support center in the U.S. and Eastern Canada, providing 24/7 support and live assistance from dedicated professionals. We strengthen relationships between dealers, customers, and factories with quality replacement parts, hands-on field support, and real-time help. Our Field Service Representatives, strategically located across the U.S. and Canada, are ready to provide on-site support when needed—helping us deliver excellence in customer service.

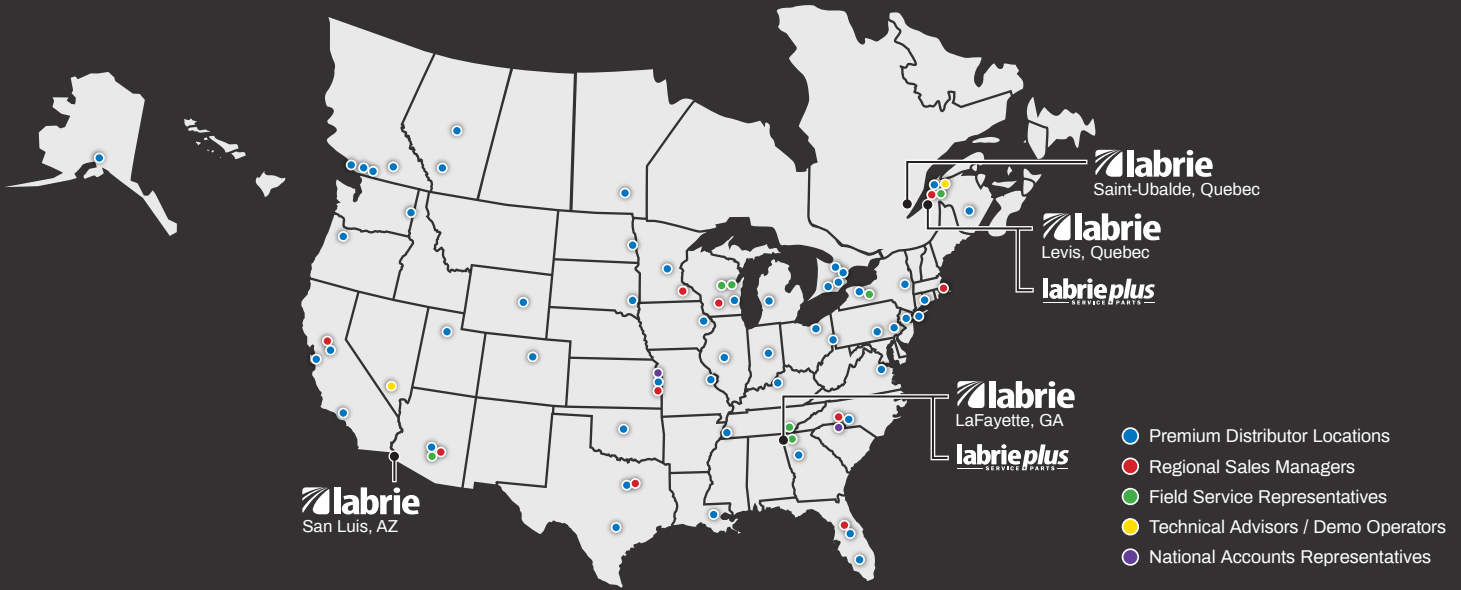

## Our North American network is dedicated to quality.

Wittke™ trucks are supported by over 30 top-tier distributors spanning across 50+ sites in the US and Canada, guaranteeing a commitment to driving excellence and providing expert support.



Opt for the Wittke™ Pronto Stock Program when a pre-built model makes sense. Benefit from expedited delivery, cost savings, and a wide selection of models designed to cater to even the most demanding collection needs.



With Sourcewell, save time and money by combining the buying power of more than 50,000 government, education, and nonprofit organizations.



# DRIVE EXCELLENCE™



175-B, route Marie-Victorin, Lévis, Quebec, Canada, G7A 2T3  
 Toll Free: 1-800-463-6638 | Telephone: 418-831-8250  
 sales@labriegrup.com | www.labriegrup.com



**United States of America**  
 1198 Shattuck Industrial Blvd, Lafayette, GA, 30728  
 Toll Free: 1-800-231-2771  
 usa.labriepus.com | partscenter@labriepus.com

**Canada**  
 455 Ave 1, Levis, Quebec, Canada, G6W 5M6  
 Toll Free: 1-877-452-2743  
 canada.labriepus.com | labriepuqc@labriegrup.com

Labrie Environmental Group is ISO 9001:2015 certified, ensuring product quality. Trademarks, including Labrie Environmental Group™ and logo, are owned by Labrie Environmental Group, Inc. Products may be protected by patents owned by Labrie Environmental Group, Inc. All rights reserved. For legal details, visit <https://labriegrup.com/copyrights-patents-trademarks>. Labrie Environmental Group strives for accurate information but is not liable for errors or omissions. Some features may be optional. Contact us for pricing and options or to find your local distributor. Visit [www.labriegrup.com](http://www.labriegrup.com) for the latest spec sheets. Web version takes precedence over printed literature. Sales subject to current General Terms and Conditions of Sale by Labrie Environmental Group, Inc. Seller rejects additional/conflicting terms without written consent.